

## Modern ground-borne sound microphone and C-3 hybrid correlator in one

### Special features


- Expandable to C-3 correlator
- Pitch function
- Modern design
- Colour touch display and rotary encoder
- Pinpointing function with histogram
- Freely selectable filter adjustment
- Easy to use menu structure

### Description

As its modern successor, the Correlux C-3 HL completes the successful Hydrolux equipment range.

In addition to the already familiar DSA technology (double-segment analysis) from the HL-5000, the C-3 HL now also features a pitch function. This C-3 HL function allows the user to transfer low-frequency leak noises into more audible frequency ranges with the simple press of a button. Users are thus provided with the greatest possible safety in the analysis of potential leak noises.

With the optionally available PT-3 power transmitters or the MS-3 digital multisensors, you can expand the Correlux C-3 HL simply and cost-efficiently into a powerful correlator system. The corresponding functions are already integrated into the Correlux C-3 HL, making the system "correlation ready". Features such as an operating time of 16 hours and the protection class IP65 top off the package offered by the C-3 HL.

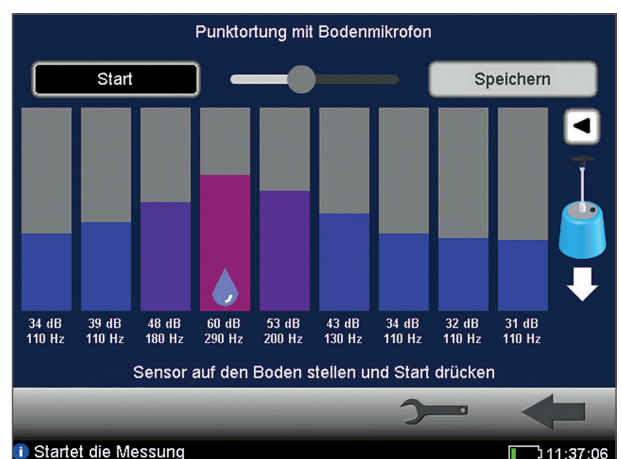

## Technical data

Display	5.7" VGA colour display 640 x 480 pixels
Data entry	Touch display, rotary encoder with Enter function
Power supply	Internal lithium-ion battery, ext. power supply 12 V DC
Operating time	min. 16 h
PC-interface	USB
Connection options	PAM W2, PAM Corr
Protection class	IP65
Dimensions / weight	250 x 190 x 100 mm / 1.9 kg
Filter range	Freely selectable
Pinpointing function	Histogram

