




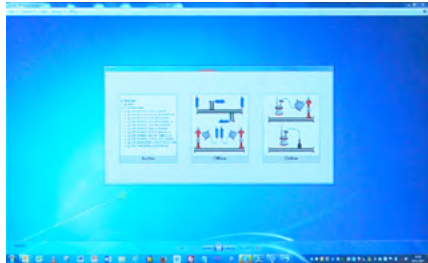

## Technical data

Software		
Operating systems	Microsoft Windows 98/2000/XP/Vista	
Software features	Multi-frequency analysis; Automatic overview measurement; GPS support; 2D/3D correlation analysis; Saving noise data; Integrated sketch program; Multicorrelation; Correlation quality analysis (CQA); FFT analysis; Speed measurement; Logging functions; 10 pipe sections	
Radio transmitter PT-3 A/B		
Sensor	Piezo sensor with active amplifier (standard) / hydrophone (optional)	
Indicators	I/O LED (device On/Off) Radio LED (radio module On/Off) Row of LEDs (battery status or measured noise level)	
Operational / charge time	min. 12 h	
Supply	Extern 12V DC / 230 V AC	
Connections	Sensor (microphone/hydrophone), Radio antenna	
Protection class	IP 65	
Operating temperature	-20 °C ... +60 °C	
Dimensions	Ø 125 x 111 mm	
Weight	0.9 kg	
Multi-sensor COR MS-3		
Sensors	Piezo sensors with active amplifier	
Adapter	Magnetic adapter	
Power supply	Internal rechargeable Li-Ion battery, inductive charging	
Dimensions	Ø 45 x 115 mm	
Weight	0.4 kg	
Protection class	IP 6	

## Order Information

Product	Description	Order number
<b>C-3 Standard Set includes</b>		
	Correlator, 2x power transmitter, 2x PAM CORR-2 (active universal microphone Piezo sensor), case, charging unit, car charging adaptor 3.5 m, stereo headphones, extension rod for PAM T-2/U, 2x nylon cord 3 mm blue, connection cable set (USB port), CorreluxView (PC software)	1006550
<b>C-3 Pro Set</b>		
	Correlator, 2x power transmitter, 3x Correlux multisensor, 2x PAM CORR-2 (active universal microphone Piezo sensor), case, charging unit, car charging adaptor 3.5 m, stereo headphones, 2x extension rod for PAM T-2/U, 3x nylon cord 3 mm blue, connection cable set (USB port), CorreluxView (PC-Software), set of labels, 3x trivet adaptor, 3x tripod adapter, 3x magnetic angled adaptor + mounting kit	1006551
<b>C-3 ProPlus Set</b>		
	Correlator, 2x power transmitter, 3x Correlux multi-sensor, 2x PAM CORR-2 (active universal mikrophone Piezosensor), case, charging unit, car charging adaptor 3.5 m, stereo headphones, 2x extension rod for PAM T-2/U, 3x nylon cord 3 mm blue, connection cable set (USB port), CorreluxView (PC-Software), set of labels, 3x trivet adaptor, 3x tripod adapter, 3x magnetic angled adaptor + mounting kit	1006552
<b>Extension sets</b>		
<b>PAM W-2 Set</b>		
	Windproof ground microphone without accessories, Connection lead, carrying rod, adapter for PAM W-2, VK 100 connection lead	1009211
<b>PAM HYDRO-3 Set</b>		
	2x Piezo hydrophone, 2x adaptor for UF-Hydrant, 2x venting tube 2x VK 114 connection cable, 2x Storz coupler (size C), female threat G1 1.5" GEKA coupler with female threat G1 1.5", transport case	1007009
<b>PAM HYDRO-2 Set</b>		
	2x PAM HYDRO-2, AD HYDRO-2, 2x connection lead, 2x de-aeration hose, transport case, 2x storz-connector (size B) 2x GEKA G11 outer thread G1 1,5", 2x reduction Alu inner thread. G1/G2 - 1.5"/2.0"	118303592
<b>Accessories</b>		
AD S-20	Valve adapter 20 mm	810000357
AD S-42	Valve adapter 42 mm	810000358
VK 100	Connection cable DK P-2 / TX	118302742
VK 98	Extension lead 2.5 m	108301284
LOG GPS	GPS-Modul for Commander LOG	118303791
PAM CORR T-3	A/B High Temperature Sensor -130°C (two pcs. req.)	1007108

### SebaKMT

Megger Germany GmbH · Dr.-Herbert-Iann-Str.6 · D-96148 Baunach

Tel. +49 95 44 - 6 80 · Fax +49 95 44 - 22 73

sales@sebakmt.com · [www.sebakmt.de](http://www.sebakmt.de)

**sebaKMT**  
by Megger®